

PORTABLE CEILING LIFT SOLUTION

Maxi Sky[®] 440



Our complete range of Maxi Sky ceiling lifts is designed to integrate with your care environment, helping to ensure a comfortable and dignified experience for everyone involved. The Arjo ceiling lifts allow caregivers to transfer patients or residents without manual lifting, thereby helping to reduce the risk of injury for themselves and the person in their care.

- **Simple for the caregiver**
The Maxi Sky 440 is an easy-to-operate portable ceiling lift system, which allows a single caregiver to perform transfers of patients, avoiding the stress and strain associated with manual lifting.
- **Flexibility to meet your care setting needs**
Designed to be easy to move around and to quickly attach to a gantry or track, this portable ceiling lift can be set up wherever patient handling is required. Maxi Sky 440 and its integrated foldable two point spreader bar is also compatible with the large range of Arjo loop slings.

ARJO MOBILITY GALLERY



D



E

© Arjo 2019


D. Unable to bear weight through feet. Is able to sit if well supported.

E. Difficulty maintaining sitting, hence might remain lying/partially lying in bed, and may only sit in a special supportive chair.

PRODUCT INFORMATION

Max. safe working load (SWL)	200 kg / 440 lbs
Unit weight (batteries included)	6.5 kg / 14.3 lbs
Lifting speed	4.3 cm/s / 1.7 in/s
Folding sling hooks	Reduced space for storage/transport
Electronic microprocessor	Soft-start and stop motor control
Maintenance required indicator	Visual LED
Lift - protection class - shock prevention	Internally powered equipment
Strap length	2200 mm / 88 in
Optional scale	External scale available
Noise level for either raising or lowering, with or without load	54 dBA max
Batteries	
Battery	2x2.3 Ah will average 2 to 4 hours to a complete charge
Battery capacity	Provides up to 30 transfers with a load of 80 kg (176 lbs)
Low battery indicator	Audible
Visual LED indicators	Flashing yellow (charging). Solid yellow (charged).
Hand control	
Low force activation buttons, polyester membrane	IPX7
ABS fire retardant	V0
Charger unit	
Power indicator on charging module	
100-240 Vac/50-60 Hz/24 VA	
Battery charger safety protection	Class 2, double insulated
Safety features	
Electrical up and down emergency buttons	Located on the motor cab
Emergency stopping device (push button) accessible below unit	Stop functions
Emergency brake	In case of mechanical failure
Manual emergency lowering device	Accessible from the motor cab
ABS Fire retardant casing	V0

SPACE REQUIREMENT

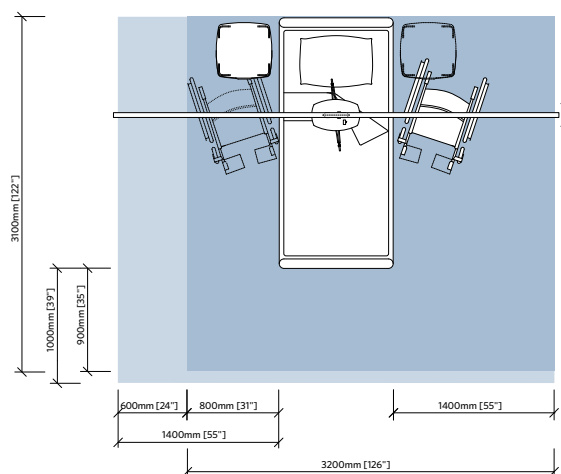

Arjo slings and spreader bars are a vital part of our patient lifting systems. A variety of slings and spreader bars provides a range of different choices when lifting and transferring patients.

For more information about our accessories, please contact your local sales representative or visit www.arjo.com.

Blue area shows the minimum working area required for the staff to be able to use the mechanical aids in an ergonomic way from one side.

Light blue area shows required extension of working area to facilitate activities from either side to provide adequate access.

At Arjo, we are committed to improving the everyday lives of people affected by reduced mobility and age-related health challenges. With products and solutions that ensure ergonomic patient handling, personal hygiene, disinfection, diagnostics, and the effective prevention of pressure injuries and venous thromboembolism, we help professionals across care environments to continually raise the standard of safe and dignified care. Everything we do, we do with people in mind. www.arjo.us

Arjo Inc. · 2349 West Lake Street · Addison, Illinois 60101 · 800-323-1245 · www.arjo.us

Arjo Canada Inc. · 90 Matheson Blvd West, Suite 350 · Mississauga, ON, L5R 3R3 · 800-665-4831 · Info.Canada@arjo.com · www.arjo.ca

arjo